



GP1234 Airless sprayer



Pressure conversion ratio: 34: 1

No-load displacement(L/min): 5.6

Inlet pressure(MPa): 0.3-0.6

Air consumption(L/min): 180-2000

Cylinder diameter(mm): $\Phi 125$

Dimensions(mm)width \times height \times high: 480 \times 480 \times 800

Weight(kg): 39

Note: The no-load displacement is the displacement pressure of the coating under

GP1234 high pressure airless coating equipment

Scope : Can be spray encaustic tile, furniture, steel structure, ships, constructs the inside and outside wall latex paint, tannery spray coating glue water, each kind of coating and paint pressured air as the power, steady and reliable, malfunction ratio is extremely low.

Pressure pulsation is small, the coating layer is even, the coating quality is better.

The route is long, the exhaust is big, the frequency of switching direction is low, hard to be damaged by friction, the life of the machine and the maintenance cycle extends.

Use new type silencing device.

It is a type of small car, the structure is close, the movement is convenient.

Quality first is our eternal pursuit



Quality first is our eternal pursuit

Customer confidence and satisfaction is our greatest pride



TALENCO DVB-3091



Portable Dust Free Blast Machine is a light-weight , portable abrasive blasting tools with an integral abrasive recovery system. During Blasting , abrasive is continually recycled , while dust and other debris are collected in a slip-on dust bag Interchange adapter boots for level surfaces , corners, etc. fit over the swivel blast head to assure efficient recovery on any surface

Feature

Lightweight

Machine weight only 7 lbs (3 kg) plus up to 4 lbs (2 kg) abrasive charge.

Compact

Small enough for being used in the “hard-to-get-at areas”.

Flexible

Swivel head – use at any angle.

Time saving

Always ready for action – simply couple 3/4" (19 mm) air line and start blast cleaning.

Recycles abrasive

Re-usable abrasives, i.e. steel shot and grit, chilled iron, aluminum oxide, silicon carbides, glass beads, etc. can be used.(40 ~100Mesh is advised).

Double action lever

No dismantling to recharge empty abrasive container. First pressure picks up new abrasive charge or vacuums the work surface. Second pressure starts blast cleaning/recycling operation.

Air pressure only – no other form of power supply needed

Requires 33-60 CFM at 9-100 lbs P.S.I.


Blast pattern approximately 1 1/4 (32 mm) wide.



TALENCO DVB-3091

Model	Volume (Abrasive/kg)	Air Consumption (m ³ /min)	Spray Swath (mm)	Capacity(m ² /h)	Weight (Kg)
DVB-3091	2	1.5	50	2-5	3


Weld cleaning

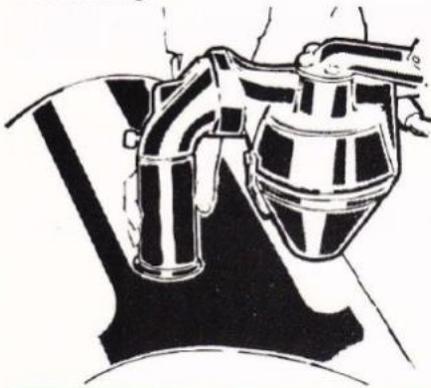

Tank cleaning



Overhead paint removal

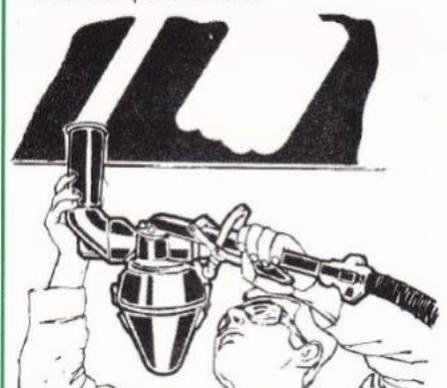


Edge cleaning



90° angle cleaning



Flexible hose, dust collector and hood, available as optional extras.

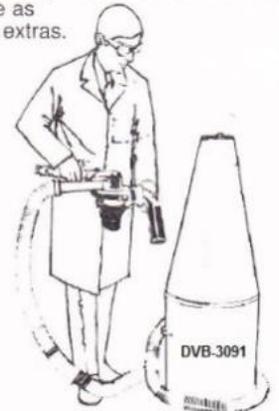

TLS-395 Airless sprayer



The TLS-395 is a solid unit built for the professional just “starting out.”
Light-weight and portable – at 20 kg it's easy to lift and carry.
The TLS-395 is the ideal sprayer for residential jobs, and is the best value in small electric sprayers.
Standard supplied including 10 meter airless hose, spray gun and nozzle (ready for use)



	TLS-395	Specification
Voltage		220V
Power		1800W
Output Pressure		3000PSI
Output Volume		2L/Min
Jet Distance		350-400mm
Weight		20Kg

Now also available in 110 volt

Quality first is our eternal pursuit
Quality first is our eternal pursuit
Customer confidence and satisfaction is our greatest pride

TLS-595 Airless sprayer



The TLS-595 Pro is a workhorse. It's proven to be a hit with contractors who are looking for higher output and professional features in a compact and portable sprayer
Standard supplied including 10 meter airless hose, spray gun and nozzle (ready for use)



TLS-595 Specification	
Voltage	220V
Power	2800W
Output Pressure	3000PSI
Output Volume	3L/Min
Jet Distance	350-400mm
Weight	20Kg

Now also available in 110 volt

Quality first is our eternal pursuit
Quality first is our eternal pursuit
Customer confidence and satisfaction is our greatest pride

TLS-795 Airless sprayer



With a powerful 2800 watt motor, the TLS-795 Pro can handle multiple guns and is ideal for the professional residential remodeling and repainting contractor who sprays a wide variety of coatings. Standard supplied including 10 meter airless hose, spray gun and nozzle (ready for use)



TLS-795 Specification	
Voltage	220V
Power	3500W
Output Pressure	3000PSI
Output Volume	5.5L/Min
Jet Distance	350-400mm
Weight	40Kg

Quality first is our eternal pursuit
Quality first is our eternal pursuit
Customer confidence and satisfaction is our greatest pride